


# 145t SPREADER BAR END CAP

**Maxirig**

QUALITY LIFTING SOLUTIONS

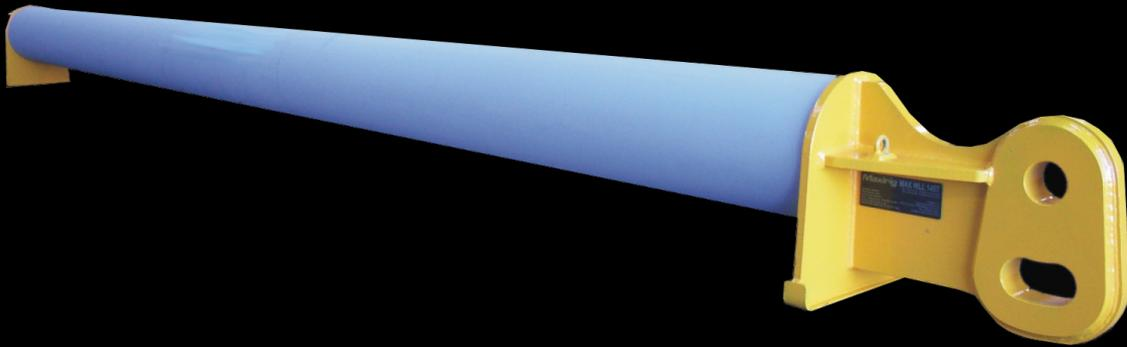


The Maxilug 145 allows users to create their own custom length, medium-lift spreader bar utilizing these heavy duty end units. Designed to accommodate readily available line pipe, Maxirig can supply the units as is or with various pipe lengths to facilitate lift spans from 2 metres up to 13 metres.

MAXIRIG PRODUCT CODE  
**MAXILUG145**

<b>Capacity:</b>	145 tonne at 60° / 80 tonne at 90°
<b>Tare Weight:</b>	210Kg each / 420Kg per pair (excludes pipe or rigging)
<b>Lifting Lugs (top) suit:</b>	85 tonne Grade 'S' safety bow shackle
<b>Load Lugs (lower) suit:</b>	85 tonne Grade 'S' safety bow shackle
<b>Intermediate Pipe:</b>	355.6mm OD x 9.53mm Wall C350LO (81.1Kg / MTR)

#### PRODUCT ASSURANCE

<b>Parent Standard:</b>	AS4991
<b>Proof Load Testing</b>	Yes
<b>MPI Weld Inspection</b>	Yes
<b>Manufacturer's Guarantee</b>	1 Year

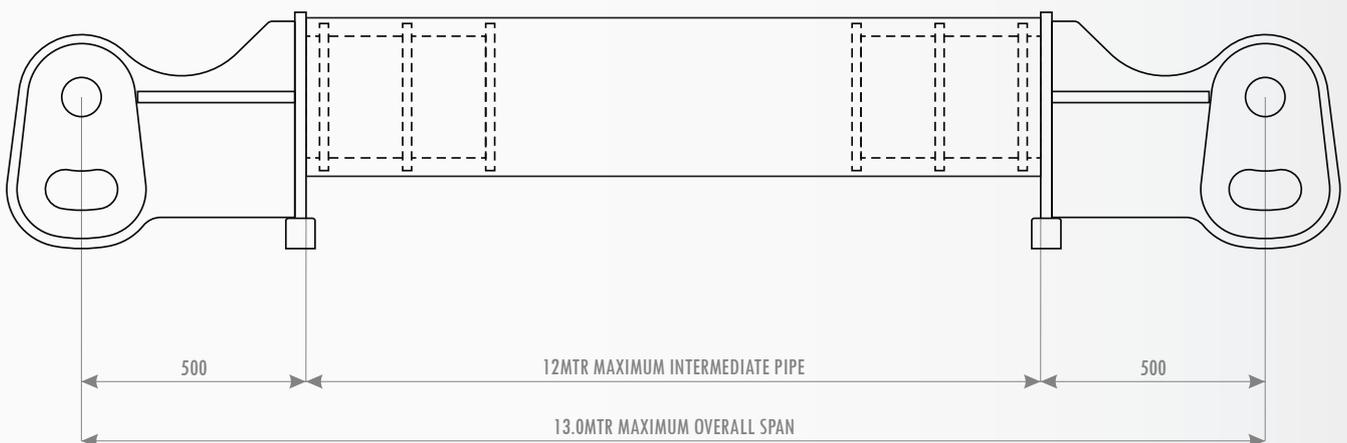

**WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE**

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.